
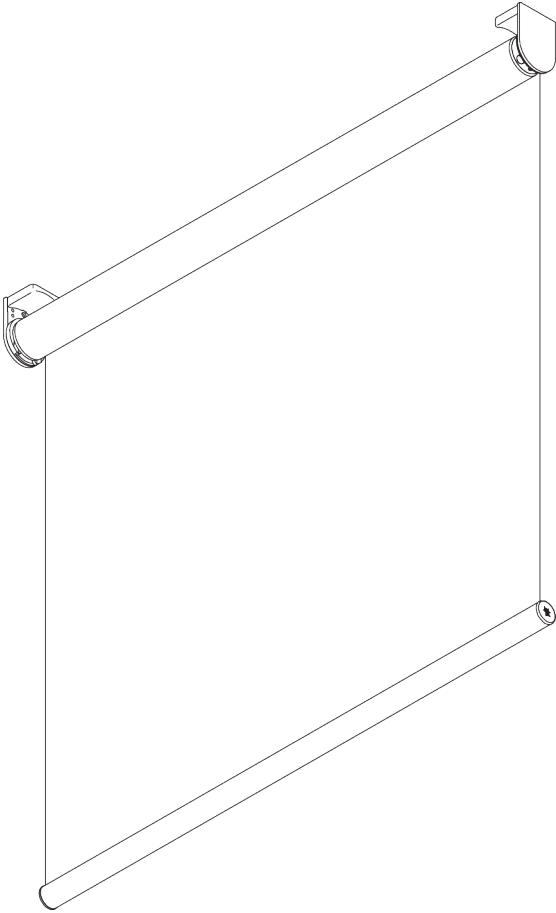


# SG 4960

---



## PRODUCT INFORMATION

- **Operation:** motorised
- **Range:** S - M
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016, grey RAL 7035, black RAL 9005; special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


### **Features:**

- Quiet and fast motors, soft stop
- Various control options
- Two connected systems
- Click-in brackets
- Fascia, box, installation profile


04/2024/V3

# SYSTEM SPECIFICATIONS


## A. SYSTEM DIMENSIONS




Single system: 2.4 m  
Double system: 4.8 m



61 cm\*  
\*see motor specification table




4 m



Single system: 9.6 m<sup>2</sup>  
Double system: 19.2 m<sup>2</sup>



5.5 kg



Recommended width /  
height ratio  
max. 1:3

## Maximum system drop

### Wall fitting (system drop on window side)


Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	400	400	400	400	400	400	390	350	320	290	270	250	230	220

### Ceiling fitting / wall fitting (system drop on room side)

Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	400	400	400	400	400	400	400	400	400	380	350	330	300	280

## B. PROFILE


### Profile information




**SG 10532**  
Tube ø 43 mm




**SG 10760**  
Bottom bar




**SG 10770**  
Bottom bar




**SG 4903**  
Bottom bar




**SG 10534**  
Installation profile




**SG 11430**  
Installation profile fascia 73 mm




**SG 11530**  
Installation profile fascia 110 mm




**SG 11431**  
Fascia round 73 mm




**SG 11531**  
Fascia round 110 mm




**SG 11432**  
Fascia square 73 mm




**SG 11532**  
Fascia square 110 mm




**SG 11433**  
Box case 73 mm




**SG 11533**  
Box case 110 mm



**SG 11434**  
Box cover 73 mm




**SG 11534**  
Box cover 110 mm



**SG 11542**  
Side guide channel

**C. HOW TO  
MEASURE**

*incl. bracket covers*

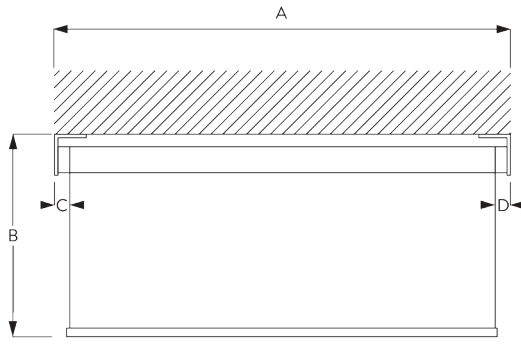


- A: System width
- B: System height
- C: Light gap: 13 mm
- D: Light gap operation side: 19 mm

Note:  
Different light gaps see motor specifications.  
All measurements include 2 mm for bracket cover per side!




**Fascia / Box**

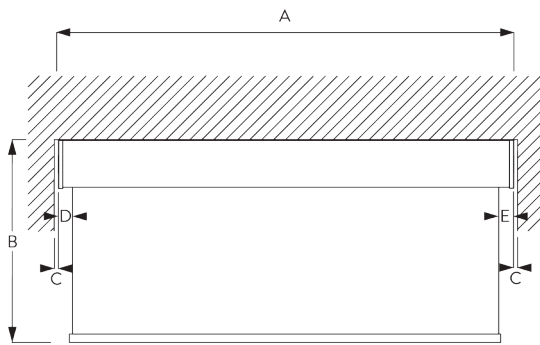


- A: System width
- B: System height
- C: Gap: min. 10 mm (when cover is used)\*
- D: Light gap: 15 mm
- E: Light gap operation side: 21 mm

Note:  
Different light gaps see motor specifications.  
\*Possible to make Fascia wider than system to reduce gap between wall and system.



**Fascia / Box with Side Profiles SG 11542**

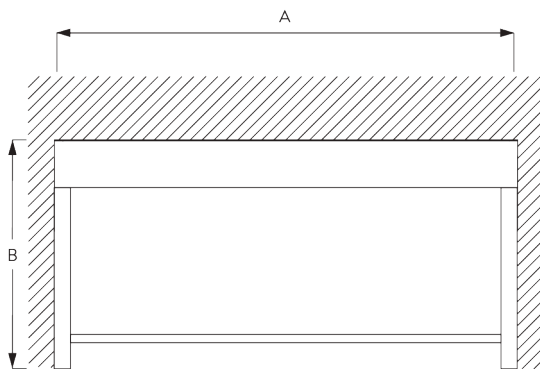

- A: System width
- B: System height

## D. SPECIFICATION

### TEXT

#### EN

Silent Gliss SG 4960 Electrically Operated Roller Blind System. Roller blind system for applications up to 2.4 m wide. Supplied made to measure and complete comprising anodised aluminium barrel SG 10532, 41 mm. Fixed to wall / ceiling / inside recess with brackets SG 10542 / SG 10543 and bracket covers SG 10574 / SG 10575. Optional installation profile SG 10534 for easy installation with clamps SG 10539. Brackets and hardware in white / grey / black finish. Assembled with powder coated white, alu or black finish aluminium bottom weight bar SG 4221 / SG 10633 / SG 10634. Connected system possible. Optional side guide wires. Integral 230V motor SG 10320 / (SG 10321 with radio receiver) left / right side. Operation by mains switch (not supplied), by remote control or mains switching by third party control system. All wiring to be strictly in accordance with Silent Gliss wiring diagrams. Fabric to be chosen from the Silent Gliss fabric range, Price Group 1-4.

#### SV

Silent Gliss SG 4960 rullgardinsystem med motor. Rullgardinsystem för installationer upp till 2.4 m bredd. Levereras komplett i specificerat mått innefattande anodiserat rör SG 10532, 41 mm. Vägg/tak och nischmontering med fästen SG 10542 / SG 10543 och täckplattor SG 10574 / SG 10575 i vitt / alu eller svart. Alternativt med installationsprofil SG 10534 som monteras med fästen SG 10539. Sidewire som tillbehör. Dubbelsystem möjligt. Monterad pulverlackerad tyngdprofil i aluminium i finish vitt / alu / svart med SG 4221 / SG 10633 / SG 10634. Integrerad 230V motor SG 10320 / (SG 10321 radiomottagare) vänster / höger sida. Styrning via väggkontakt (ej inkluderad), via fjärrkontroll eller via externt styrsystem. All elinstallation skall följa Silent Gliss kopplingsschema. Textil från Silent Gliss textilprogram i prisgrupp 1-4.

#### NO

Silent Gliss SG 4960 Rullegardinsystem med motor. Rullegardinsystem for maks. bredde på 2,4 meter. Leveres komplett på spesialmåll med anodisert rør integrert, SG 10532, 41 mm. Tak-, vegg- og nishmontering med feste SG 10542 / SG 10543 samt dekkplate SG 10574 / SG 11175 i hvit, alu eller svart. Alternativt monteringsprofil SG 10534 som monteres med feste SG 10534. Sidewire som tilbehør. Dobbelsystem mulig. Montert tyngdeprofil i pulverlakkert aluminium i hvit / alu / svart med SG 4221 / SG 10633 / SG 10634. Integrert 230V motor SG 10320 / (SG 10321 radiomottaker) venstre eller høyre side. Styring med veggkontakt (ikke inkl.), via fjernkontroll eller eksternt styringsystem. Alle elektriske installasjoner skal gjøres i.h.t. Silent Gliss koblingskjema. Tekstil fra Silent Gliss kolleksjon i prisgruppe 1-4.

#### DA


Silent Gliss SG 4960 elektrisk rullegardinsystem. Rullegardinsystemer til installationer med op til 2,4 m bredde. Leveres i ønsket længde og samlet. Består af anodiseret aluminiumrør SG 10532, 41 mm. Fastgøres i væggen / loftet / indfældes med beslagene SG 10542 / SG 10543 og beslagafdækningerne SG 10574 / SG 10575. Alternativt med installationsprofil SG 10534 for nem installation med klemmerne SG 10539. Beslag og armaturer i hvid / alu / sort finish. Samlet med pulverlakeret hvid, alu eller sort finish tyngdeprofil af aluminium SG 4221 / SG 10633 / SG 10634. Mulighed for tilsluttet system. Sidewirer som tilbehør. Integreret 230 V motor SG 10320 / (SG 10321 med radiomdtager) venstre / højre side. Styres med lysnetkontakt (medfølger ikke), med fjernbetjening eller lysnetkontakt fra tredjepart system. Al ledningsføring skal udelukkende vælges i henhold til Silent Gliss ledningsdiagrammer. Stoffet vælges fra Silent Gliss stofprogrammet, prisgruppe 1-4.

# FITTING


## A. FITTING INFORMATION

### Fixing points


For detailed fitting information, visit the Silent Gliss website.

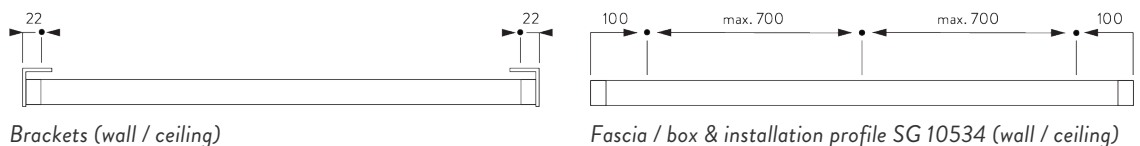


## B. CEILING FITTING




**Brackets**



**Installation profile SG 10534 and clamps SG 3033 or SG 3044**




**Installation profile SG 10534 and click bracket SG 10539**  
Not possible with two connected systems!

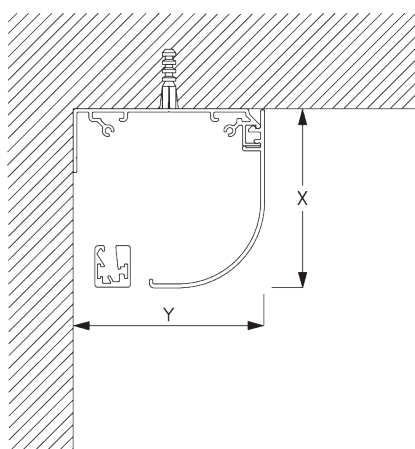

**Fascia round**

X = Fascia S 73 mm / Fascia L 110 mm


Y = Fascia S 78 mm / Fascia L 110 mm

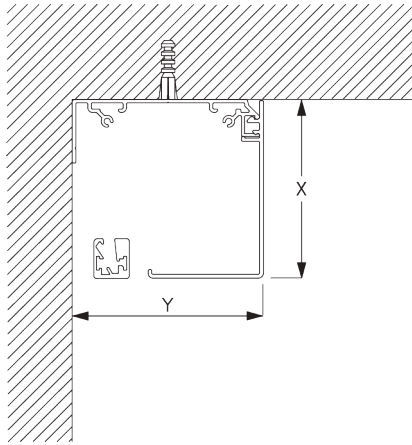

**Fascia square**

X = Fascia S 73 mm / Fascia L 110 mm


Y = Fascia S 78 mm / Fascia L 110 mm

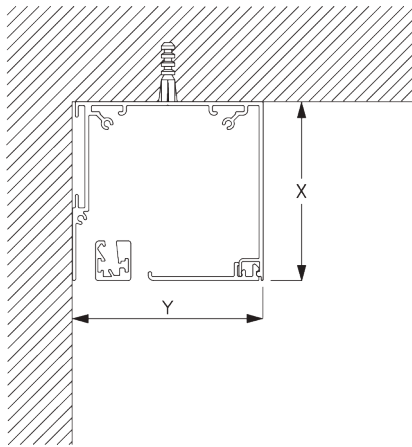

**Box**


X = Box S 73 mm / Box L 110 mm

Y = Box S 78 mm / Box L 110 mm




**SG 3033**

Clamp




**SG 3044**

Clamp




**SG 10534**

Installation profile




**SG 10539**

Bracket



**SG 10542**

Bracket




**SG 10543**

Bracket




**SG 10574**

Bracket cover



**SG 10575**


Bracket cover




**SG 10690**

Spacer


## C. WALL FITTING



**Brackets**




**Installation profile SG 10534 and clamps SG 3033 or SG 3044**



**Installation profile SG 10534 and click bracket SG 10539**  
Not possible with two connected systems!




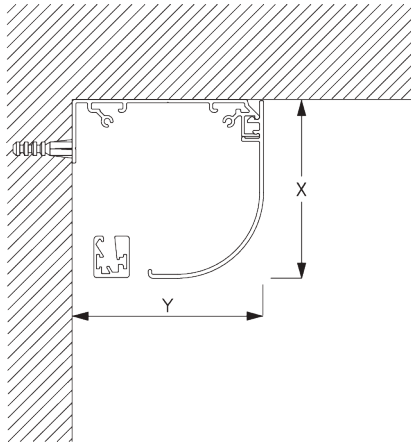

**Fascia round**

X = Fascia S 73 mm / Fascia L 110 mm


Y = Fascia S 78 mm / Fascia L 110 mm

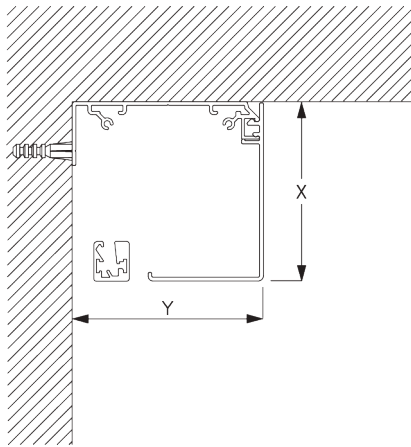

**Fascia square**

X = Fascia S 73 mm / Fascia L 110 mm


Y = Fascia S 78 mm / Fascia L 110 mm

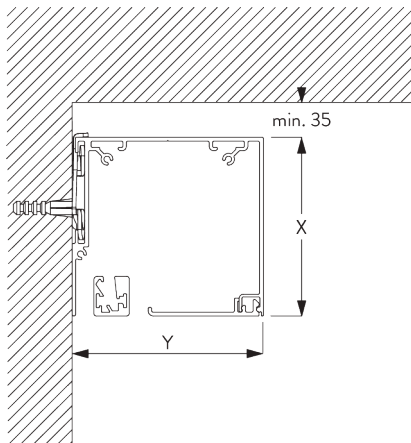


**Box S and clamp SG 3044 / Box L and clamp SG 11180**

X = Box S 73 mm / Box L 110 mm


Y = Box S 78 mm / Box L 110 mm




**SG 3033**  
Clamp




**SG 3044**  
Clamp




**SG 11180**  
Clamp




**SG 10534**  
Installation profile



**SG 10539**  
Bracket




**SG 10542**  
Bracket




**SG 10543**  
Bracket



**SG 10574**  
Bracket cover




**SG 10575**  
Bracket cover




**SG 10690**  
Spacer


## D. RECESS FITTING

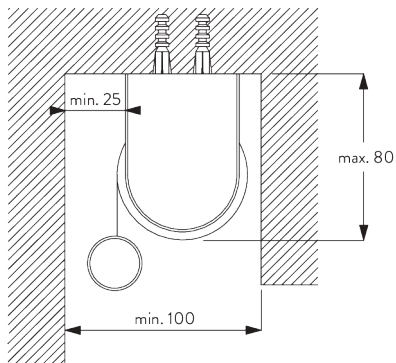


**Brackets**

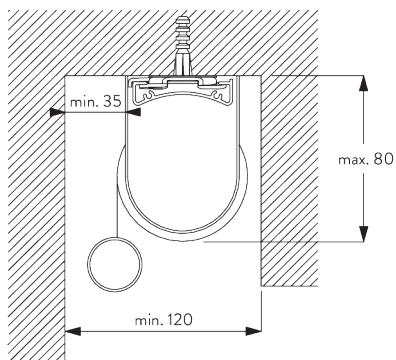


**Installation profile SG 10534 and clamps SG 3033 or SG 3044**

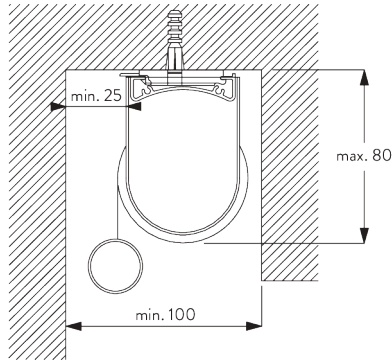


**Installation profile SG 10534 and click bracket SG 10539**  
 Not possible with two connected systems!

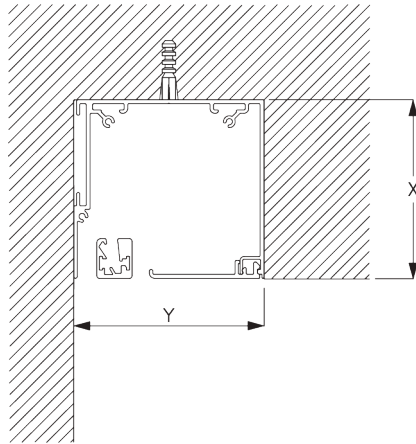


**Box**  
 X = Box S 73 mm / Box L 110 mm  
 Y = Box S min. 79 mm / Box L min. 111 mm




**SG 3033**  
 Clamp




**SG 3044**  
 Clamp




**SG 10534**  
 Installation profile



**SG 10539**  
 Bracket




**SG 10542**  
 Bracket




**SG 10543**  
 Bracket



**SG 10574**  
 Bracket cover





**SG 10575**  
 Bracket cover





**SG 10690**  
 Spacer


**E. FITTING WITH  
SIDE GUIDE  
OPTION**



**Single system**




**Double system (side-by-side installation)**




**SG 8235**

Side guide wire base short




**SG 8236**

Side guide wire base long




**SG 8237**

Side guide wire holder




**SG 8249**

Side guide device




**SG 10762**

Side guide end cover




**SG 10772**

Side guide end cover




**SG 4944**

Side guide end cover




**SG 10641**

Side guide eyelet




**SG 10642**

Side guide wire holder




**SG 10643**

Side guide wire ø 1.3 mm x 4.2 m




**SG 10669**

Side guide double base long




**SG 10673**

Side guide double base short




**SG 10701**  
Side guide double wire holder



**SG 10706**  
Side guide wire ø 1.3 mm x 2.6 m


## SYSTEM OPTIONS

### A. FABRIC ROLL-OFF

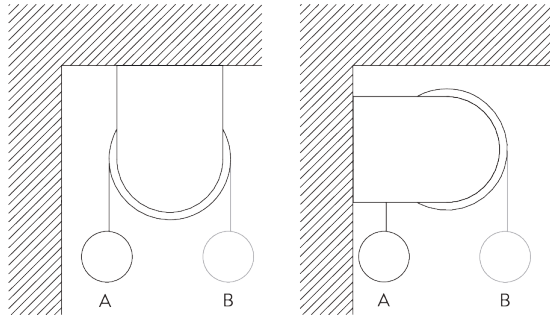


A: Fabric roll-off window side (standard)  
B: Fabric roll-off room side (option)

### B. INSTALLATION PROFILE



## C. SIDE GUIDES

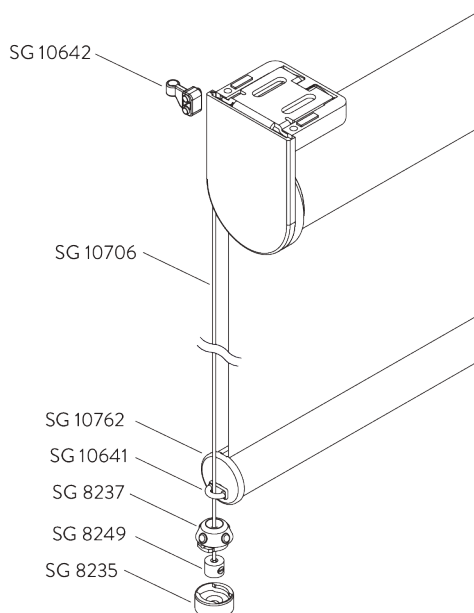

### Additional parts:

- 2x SG 8235 Side guide wire base short
- 2x SG 8237 Side guide wire holder
- 2x SG 8249 Side guide device
- 2x SG 10762 Side guide end cover round
- 2x SG 10641 Side guide eyelet
- 2x SG 10642 Side guide wire holder
- 2x SG 10706 Side guide wire  $\varnothing$  1.3 mm x 2.6 m


### Optional parts:

- 2x SG 8236 Side guide wire base long
- 2x SG 10772 Side guide end cover square
- 2x SG 10643 Side guide wire  $\varnothing$  1.3 mm x 4.2 m
- 1x SG 10669 Side guide double base long
- 1x SG 10673 Side guide double base short
- 1x SG 10701 Side guide double wire holder

### Note:

- Light gaps increase when side-guide option is used
- Up to 15° from vertical

## D. TWO CONNECTED SYSTEMS




### Additional parts:

- 1x SG 10558 Connection tube adapter
- 2x SG 10626 Connection bracket
- 2x SG 10627 Connection flange
- 1x SG 10628 Connection tube adapter
- 1x SG 10632 Connection bracket cover

### Note:

- Not possible with 24 V motor SG 10692!


## E. TWO SINGLE SYSTEMS SIDE-BY-SIDE



### Additional parts:

- 1x SG 10632 Connection bracket cover

## F. FASCIA / BOX

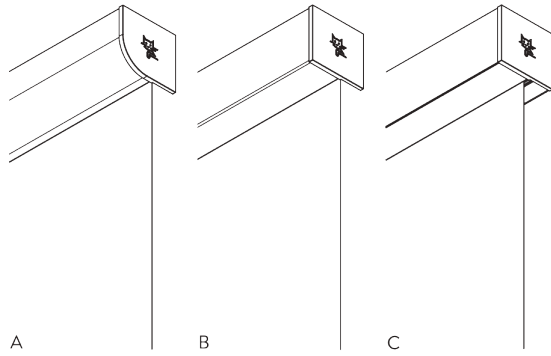


A: Fascia round  
B: Fascia square  
C: Box

### Size

- S: 78 x 73 mm
- L: 110 x 110 mm

### Note:


- Only applicable with bottom bar SG 11442
- Not possible with connected systems
- Two systems with one Fascia possible upon request

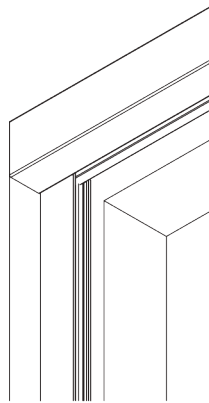

Optional side guide channels SG 11542 to be used with Fascia or Box.

### Note:

- Only applicable with inside fitting
- Box: only recess fitting

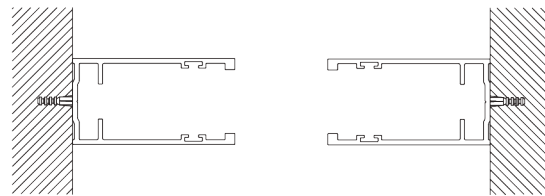

# MOTORS & CONTROLS

## A. MOTOR FEATURES

	50-Series	20-Series	20-Series	10-Series K	5-Series	24 V DC
Motors	SG 11250	SG 10321	SG 10320	SG 10514	SG 10715	SG 10692

### Motor Features

Soft stop	•	•	•			
Electronic end-stop	•	•	•			•
Electronic revolution counter (unlimited revolution)	•	•	•			•
Mechanical end-stop				•	•	
Mechanical revolution counter (limited revolution)				•	•	
Two intermediate positions possible		•				
Bottom bar alignment	•					
Noiseless stop		•	•	•		•
Parallel wiring possible without additional relays		•	•			
Disconnectable motor cable	•	•	•			
IP class	IP 30	IP 44	IP 44	IP 44	IP 44	IP 30

### Control Features

Mains power control		•	•	•	•	
Dry contact control						•
SG Control L (built-in receiver)		•				
Smart by Silent Gliss	•					
Suitable for most major home automation systems (with suitable interface)		•	•	•	•	•

## B. MOTOR SPECIFICATIONS

Motors	Light gaps* C / D = driving side	Min. system width	Voltage	Current	Frequency	Speed	Frequency receiver
<b>50-Series (Smart by Silent Gliss)</b>							
SG 11250	C: 9 mm / D: 26 mm	61 cm	24 V DC	1.8 A	-	55 rpm	-
<b>20-Series</b>							
SG 10320 (standard)	C: 13 mm / D: 19 mm	61 cm	230 V AC	0.55 A	50 Hz	70 rpm	-
SG 10321	C: 13 mm / D: 19 mm	61 cm	230 V AC	0.55 A	50 Hz	70 rpm	868/915 MHz
<b>10-Series K</b>							
SG 10514	C: 9 mm / D: 25 mm	50 cm	230 V AC	0.52 A	50 Hz	30 rpm	-
<b>5-Series</b>							
SG 10715	C: 9 mm / D: 25 mm	61 cm	230 V AC	0.485 A	50-60 Hz	28 rpm	-
<b>24 V DC</b>							
SG 10692	C: 13 mm / D: 19 mm	50 cm	24 V DC	0.7 A	-	25 rpm	-

\*Light gaps Fascia or Box: C +2 mm / D +2 mm

## C. OPERATING METHODS

See catalogue "controls" for details.



Wall Switch



System can be operated by fixed wall switch.

SG Control L



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

Smart by Silent Gliss



Open designed two-way communication system which allows to flawlessly integrate products with most major building management systems.


**D. WIRING**  
**DIAGRAMS**




Refer to Silent Gliss website.

# PARTS

## A. STANDARD PARTS



**SG 4226**  
Double tape 30 mm



**SG 9917**  
Hirschmann portable socket-outlet STAK 3 N




**SG 10284**  
O-Ring




**SG 10320**  
Tubular motor 230V AC, 20 Series S 1.5/70




**SG 10532**  
Tube ø 43 mm



**SG 10542**  
Bracket




**SG 10543**  
Bracket




**SG 10557**  
Tube adapter



**SG 10574**  
Bracket cover



**SG 10575**  
Bracket cover



**SG 10620**  
Motor flange 10/20-Series



**SG 10621**  
Tube adapter




**SG 10668**  
PVC strip 10 mm




**SG 10760**  
Bottom bar



**SG 10761**  
End cover




**SG 11354**  
Motor drive 10/20-Series



**SG 3033**  
Clamp



**SG 3044**  
Clamp



**SG 4508**  
Brush 5x7 mm



**SG 4903**  
Bottom bar




**SG 8235**  
Side guide wire base short




**SG 8236**  
Side guide wire base long




**SG 8237**  
Side guide wire holder




**SG 8249**  
Side guide device




**SG 9916**  
Hirschmann plug set



**SG 10139**  
Countersunk screw 2.9x6.5




**SG 10293**  
Cable 230V AC, 2/3/5/10 m



**SG 10300**  
Radio hand held 1 channel















































**SG 10302**  
Radio hand held 5+1 channel



**SG 10303**  
Radio hand held 10+2+1 channel

## B. OPTIONAL PARTS

	<b>SG 10321</b> Tubular motor 230V AC, 20 Series S 1.5/70, radio receiver		<b>SG 10642</b> Side guide wire holder		<b>SG 10771</b> End cover
	<b>SG 10498</b> Countersunk screw 2.9x9.5		<b>SG 10643</b> Side guide wire ø 1.3 mm x 4.2 m		<b>SG 10772</b> Side guide end cover
	<b>SG 10514</b> Tubular motor 230V AC, 10 Series S 3/30 K		<b>SG 10651</b> Connection flange		<b>SG 10804</b> Radio hand held 15+5+1 channel
	<b>SG 10534</b> Installation profile		<b>SG 10669</b> Side guide double base long		<b>SG 11178</b> End cover
	<b>SG 10539</b> Bracket		<b>SG 10673</b> Side guide double base short		<b>SG 11180</b> Clamp
	<b>SG 10544</b> Bracket		<b>SG 10690</b> Spacer		<b>SG 11250</b> Smart motor 24V DC, 50-Series S 1.5/55
	<b>SG 10558</b> Connection tube adapter		<b>SG 10692</b> Motor 24 V DC, 2/38		<b>SG 11260</b> Gateway Cedia
	<b>SG 10622</b> Tube adapter, 24V DC motor		<b>SG 10701</b> Side guide double wire holder		<b>SG 11261</b> Gateway KNX
	<b>SG 10625</b> Motor flange, 10/20-Series		<b>SG 10706</b> Side guide wire ø 1.3 mm x 2.6 m		<b>SG 11262</b> Expansion unit
	<b>SG 10626</b> Connection bracket		<b>SG 10708</b> Adapter set, 24 V DC		<b>SG 11263</b> Power supply 24V DC, 2 Ampere DIN Rail
	<b>SG 10627</b> Connection flange		<b>SG 10715</b> Tubular motor 230V AC, 5 Series S 6/28		<b>SG 11264</b> Power supply 24V DC, 3.8 Ampere DIN Rail
	<b>SG 10628</b> Connection tube adapter		<b>SG 10753</b> Motor plate		<b>SG 11265</b> Power supply 24V DC, 5 Ampere DIN Rail
	<b>SG 10632</b> Connection bracket cover		<b>SG 10762</b> Side guide end cover		<b>SG 11266</b> Power supply 24V DC, 10 Ampere DIN Rail
	<b>SG 10641</b> Side guide eyelet		<b>SG 10770</b> Bottom bar		<b>SG 11322</b> PT Screw Countersunk KA35x10 WN 1413

**SG 11323***PT Screw Countersunk KA35x12***SG 11443***End cover***SG 11534***Box cover 110 mm***SG 11355***Motor drive 5-Series***SG 11446***Bracket left 73 mm***SG 11537***Bracket cover round left 110 mm***SG 11357***Motor drive 24 V DC***SG 11447***Bracket right 73 mm***SG 11538***Bracket cover round right 110 mm***SG 11426***Power supply 24V / 2A including cable with EU/CH plug***SG 11448***Bracket left 73 mm***SG 11539***Bracket cover square left 110 mm***SG 11430***Installation profile fascia 73 mm***SG 11449***Bracket right 73 mm***SG 11540***Bracket cover square right 110 mm***SG 11431***Fascia round 73 mm***SG 11450***Bracket left 73 mm***SG 11542***Side guide channel***SG 11432***Fascia square 73 mm***SG 11451***Bracket right 73 mm***SG 11546***Bracket left 110 mm***SG 11433***Box case 73 mm***SG 11460***Cover for Hirschmann plug***SG 11547***Bracket right 110 mm***SG 11434***Box cover 73 mm***SG 11480***Radio wall transmitter 1 channel***SG 11548***Bracket left 110 mm***SG 11437***Bracket cover round left 73 mm***SG 11490***Radio wall transmitter 5+1 channel***SG 11549***Bracket right 110 mm***SG 11438***Bracket cover round right 73 mm***SG 11530***Installation profile fascia 110 mm***SG 11550***Bracket left 110 mm***SG 11439***Bracket cover square left 73 mm***SG 11531***Fascia round 110 mm***SG 11551***Bracket right 110 mm***SG 11440***Bracket cover square right 73 mm***SG 11532***Fascia square 110 mm***SG 11442***Bottom bar***SG 11533***Box case 110 mm*